

DATA SHEET

Main function

EI₂60 **High fire resistance**

C **Self-closing**
50,000 cycles

CE **CE mark**
EN 13241 / EN 16034

Additional functions with corresponding equipment

S₂₀₀ **Smoke protection**
S200

S_a **S_a**


dB **Acoustic value**
Up to 31 dB

The values depend on the configuration of the door.

Fire-rated door FST 60-1 OD

Single-leaf, self-closing fire and smoke-tight sliding door in panel construction with concealed connection via threaded rods. Magnet as hold-open device.

Closing speed can be adjusted continuously via an integrated track control (0.08 to 0.2 m/s). Integrated floor guide roller.

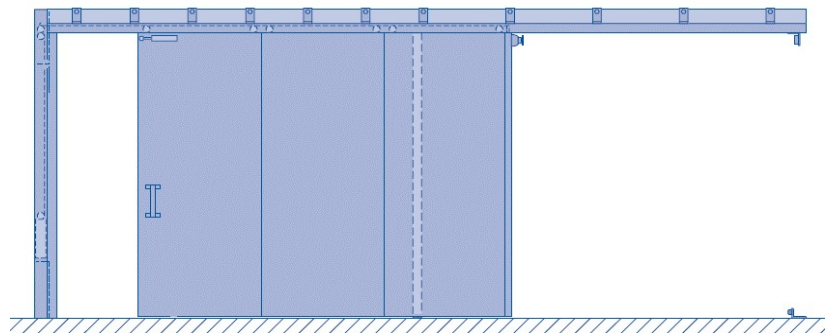

Dimensions (mm)		Standard / S _a	S ₂₀₀
Clear passage dimension (LDB / LDH)	Width (mm)	1000 - 12000	1000 - 7000
	Height (mm)	2000 - 8260	2000 - 4500
Door leaf surface	(m ²)	62,5	34
Wicket door	Width (mm)	750 - 1000	750 - 1200
	Height (mm)	1550 - 2000	1550 - 2000
Door leaf surface (m ²)	(m ²)	62,5	29

Construction and quality features		Function
Use	Internal door	•
Fastening options	Concrete, brickwork, gas concrete, encased steel construction	•
Depth in mm	Door leaf 72 mm, overall construction 132 mm	•
Design	Door leaf elements as fully bonded composite construction	•
Door leaf weight	Approx. 50 kg/m ²	•
Surface finish, door leaf and frame	Galvanized	•
	RAL to choose	○
	Stainless steel	○
Wicket door	Optionally up to 2 wicket doors, without threshold as standard, optionally with 22 mm threshold	○
Glazing	1 glass per panel / glazing possible in the wicket door	○
Fitting	Wall fitting, ceiling fitting	○
Operator	Motor-driven / manual	○

• Standard ○ Optional

Performance characteristics		
Fire resistance acc. to EN 16034	Class	E60, EI ₂ 60
Self-closing acc. to EN 16034	Class	C2, C3
Smoke protection acc. to EN 16034	Class	S ₂₀₀ / S _a
Acoustic value acc. to EN ISO 717-1	R [db]	31
CE mark	EN 13241 / EN 16034	

The performance characteristics specified can only be achieved with the corresponding equipment.

The information above, in particular the specifications and illustrations, is not binding and does not constitute an agreement on quality or a guarantee. Changes and errors are expressly reserved. The data sheet is subject to copyright. No part may be reproduced without our prior permission.