

DATA SHEET

Product line



**Fixed
with ground anchor**

Additional functions with corresponding equipment



LED lighting strips



**Coating in RAL to
choose**

F 220-600 BR

The fixed bollard is especially suitable to secure buildings or areas without requiring a driveway.

- Introductory model featuring an excellent price-performance ratio
- For combination with automatic and removable Security bollards using cylinders in matching appearance




Technical data

Version	Fixed with ground anchor
Diameter	220 mm
Material thickness	4 mm
Height	600 mm
Impact energy with destruction	150000 J
Impact energy without destruction	30000 J

Equipment		Function
Cylinder cover	ABS plastic	●
Cylinder surface	Steel S235JR – stainless steel V2A (AISI 304)	●
Surface treatment	Steel version: steel coated (Anthracite grey) Stainless steel version: stainless steel coated (Anthracite grey) or brushed	●
Reflecting strips	Improved visibility at night, all-round	●
Lighting	8 LEDs integrated in the bollard cover	○
power supply	Power supply for optional LEDs in the bollard cover for semi-automatic bollards (max. 8)	○

● Standard ○ Optional

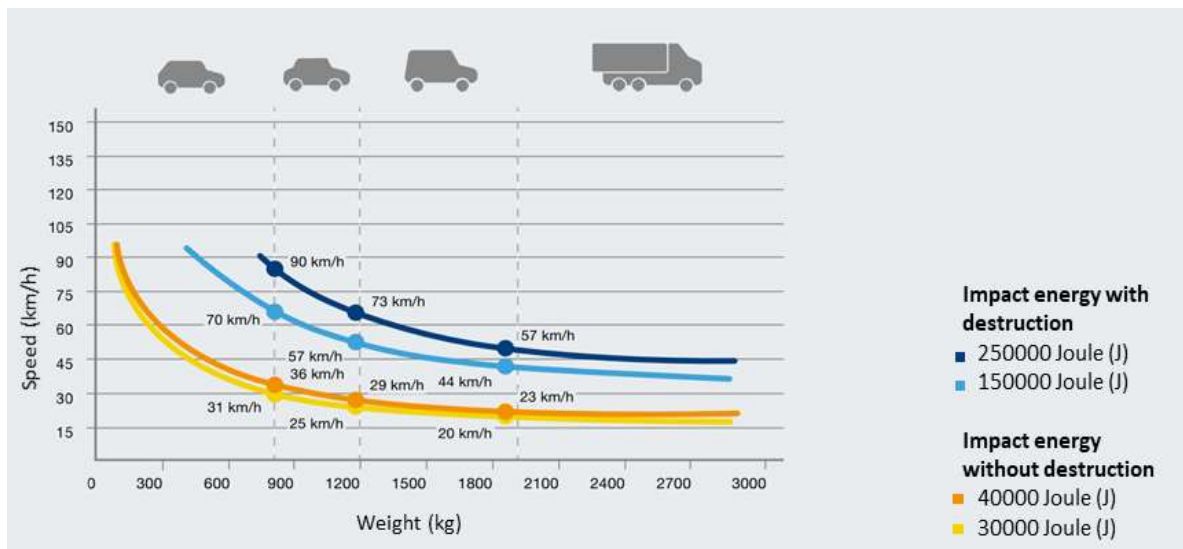

The information above, in particular the specifications and illustrations, is not binding and does not constitute an agreement on quality or a guarantee. Changes and errors are expressly reserved. The data sheet is subject to copyright. No part may be reproduced without our prior permission.