

DATA SHEET

Product line



**Removable
with reinforced base**



Classification

Additional functions with corresponding equipment



LED lighting strips



**Coating in RAL to
choose**

R 275-M30-900

The removable bollard is especially suitable for very infrequent use.

- Can be detached with special tool
- Locking via security lock with profile half cylinder
- Can be combined with automatic and fixed High Security bollards using cylinders in matching appearance




Technical data

Version	Removable with reinforced base
Diameter	273 mm
Material thickness	10 mm
Height	900 mm
Cylinder weight	92 kg
Load class according to EN 124	D400 (40 tonnes)
Security lock	Yes – profile half cylinder lock incl. 3 keys
Impact energy with destruction	750000 J
Impact energy without destruction	100000 J
Certified according to	PAS68, IWA14-1, ASTM M30, K4

Equipment		Function
Cylinder cover	Aluminium with protection against corrosion	●
Cylinder surface	Steel S355JR – stainless steel V2A (AISI 304) / V4A (AISI 316)	●
Surface treatment	Steel version: steel coated (Anthracite grey) Stainless steel version: stainless steel coated (Anthracite grey) or brushed	●
Reflecting strips	Improved visibility at night, all-round	●
Floor fitting	Ground fitting with cylinder bearing made of steel, painted, with round bottom plate (alternatively for LED)	○
Security lock	Improved security against removal by unauthorized personnel	●
Lighting	Lighting strips with 25 LEDs (RGB)	○
Power supply	Power supply for optional LEDs in the bollard cover for semi-automatic bollards (max. 8)	○
Rectangular bottom plate	For matching appearance with automatic bollards	○

● Standard ○ Optional

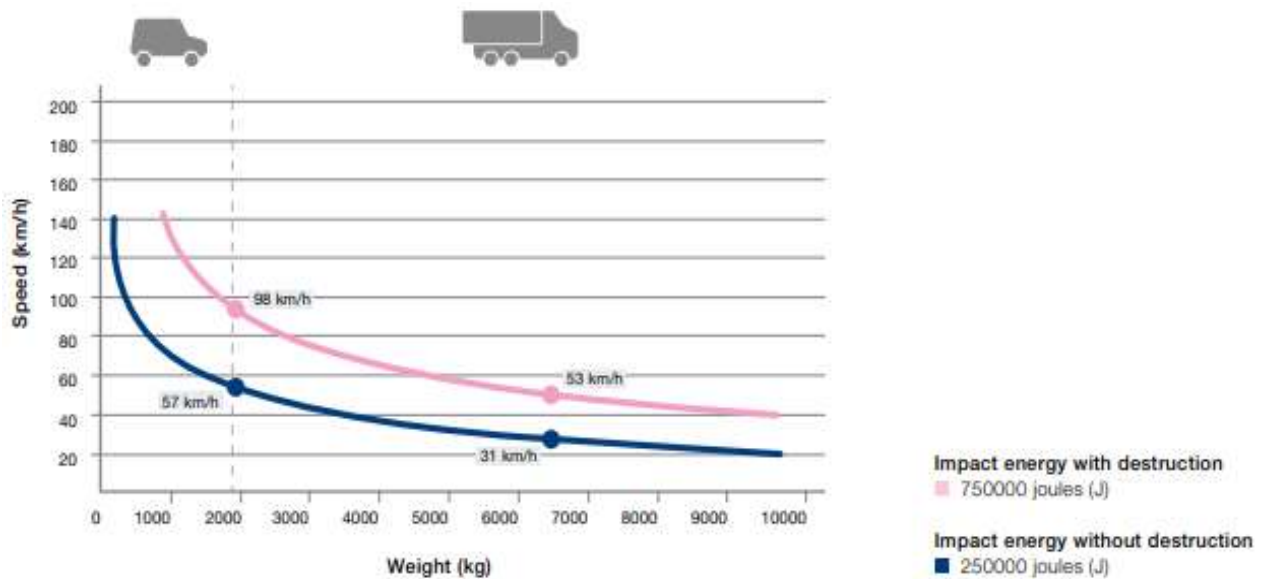

The information above, in particular the specifications and illustrations, is not binding and does not constitute an agreement on quality or a guarantee. Changes and errors are expressly reserved. The data sheet is subject to copyright. No part may be reproduced without our prior permission.